

LITHIUM-ION BATTERY PRODUCT SPECIFICATION

51.2V100Ah

Battery Pack Specification

1. Overview

51.2V100Ah Lithium iron phosphate battery module which designed for energy storage power supply system application. This battery module integrated with intelligent BMS inside, has big advantages on safety, cycle life, energy density, temperature range and environmental protection. This product specification describes the type, size, structure, electrochemistry performance, service life, and BMS characteristics.

2. Advantages

The battery module consists of single LFP cells, wire, BMS and container.

- Packed with high performance LFP single cell, long life, safety and wide temperature range
- High energy density, small size, light weight, no pollution
- Packing with single cell container, fire retardant wire and laser welding, stable and safe
- Built-in BMS, with battery voltage, current, temperature and health management
- LED indicate the battery SOC and operating status
- LCD Screen display the battery voltage, current, temp.,SOC detail information
- Support communicate with solar inverter bu CAN or RS485
- Update software by RS485 port
- Flexible customization of dimensions
- More than 15 years design life
- Stable performance, maintenance-free





3. Product photo




4. Battery module specification

Item		Specification	Conditions
Nominal	Voltage	51.2V	25°C, 0.2C
	Capacity	100Ah	
Module weight		48.0kg	±0.5kg
Dimensions(W*D*H), mm		442*470*154 (3.5U)	±2mm
Operating parameters	Charging Voltage	56.0V~57.0V	
	Discharging Voltage	43.2V	
	Charging current	Max constant charge: 100A	Recommended 30A
	Discharging current	Max constant discharge: 100A	
Temperature	Charge range	0°C -65°C	
	Discharge range	0°C -65°C	
	Storage range	-20°C~55°C	
BMS	Built-in BMS	Voltage, current, temperature management & cell balance	RS485, CAN communication
Service life	Design life	>15years	25°C
	Cycle life	>6000 times, 0.5C, 80%DOD	

5. Dimension Drawing

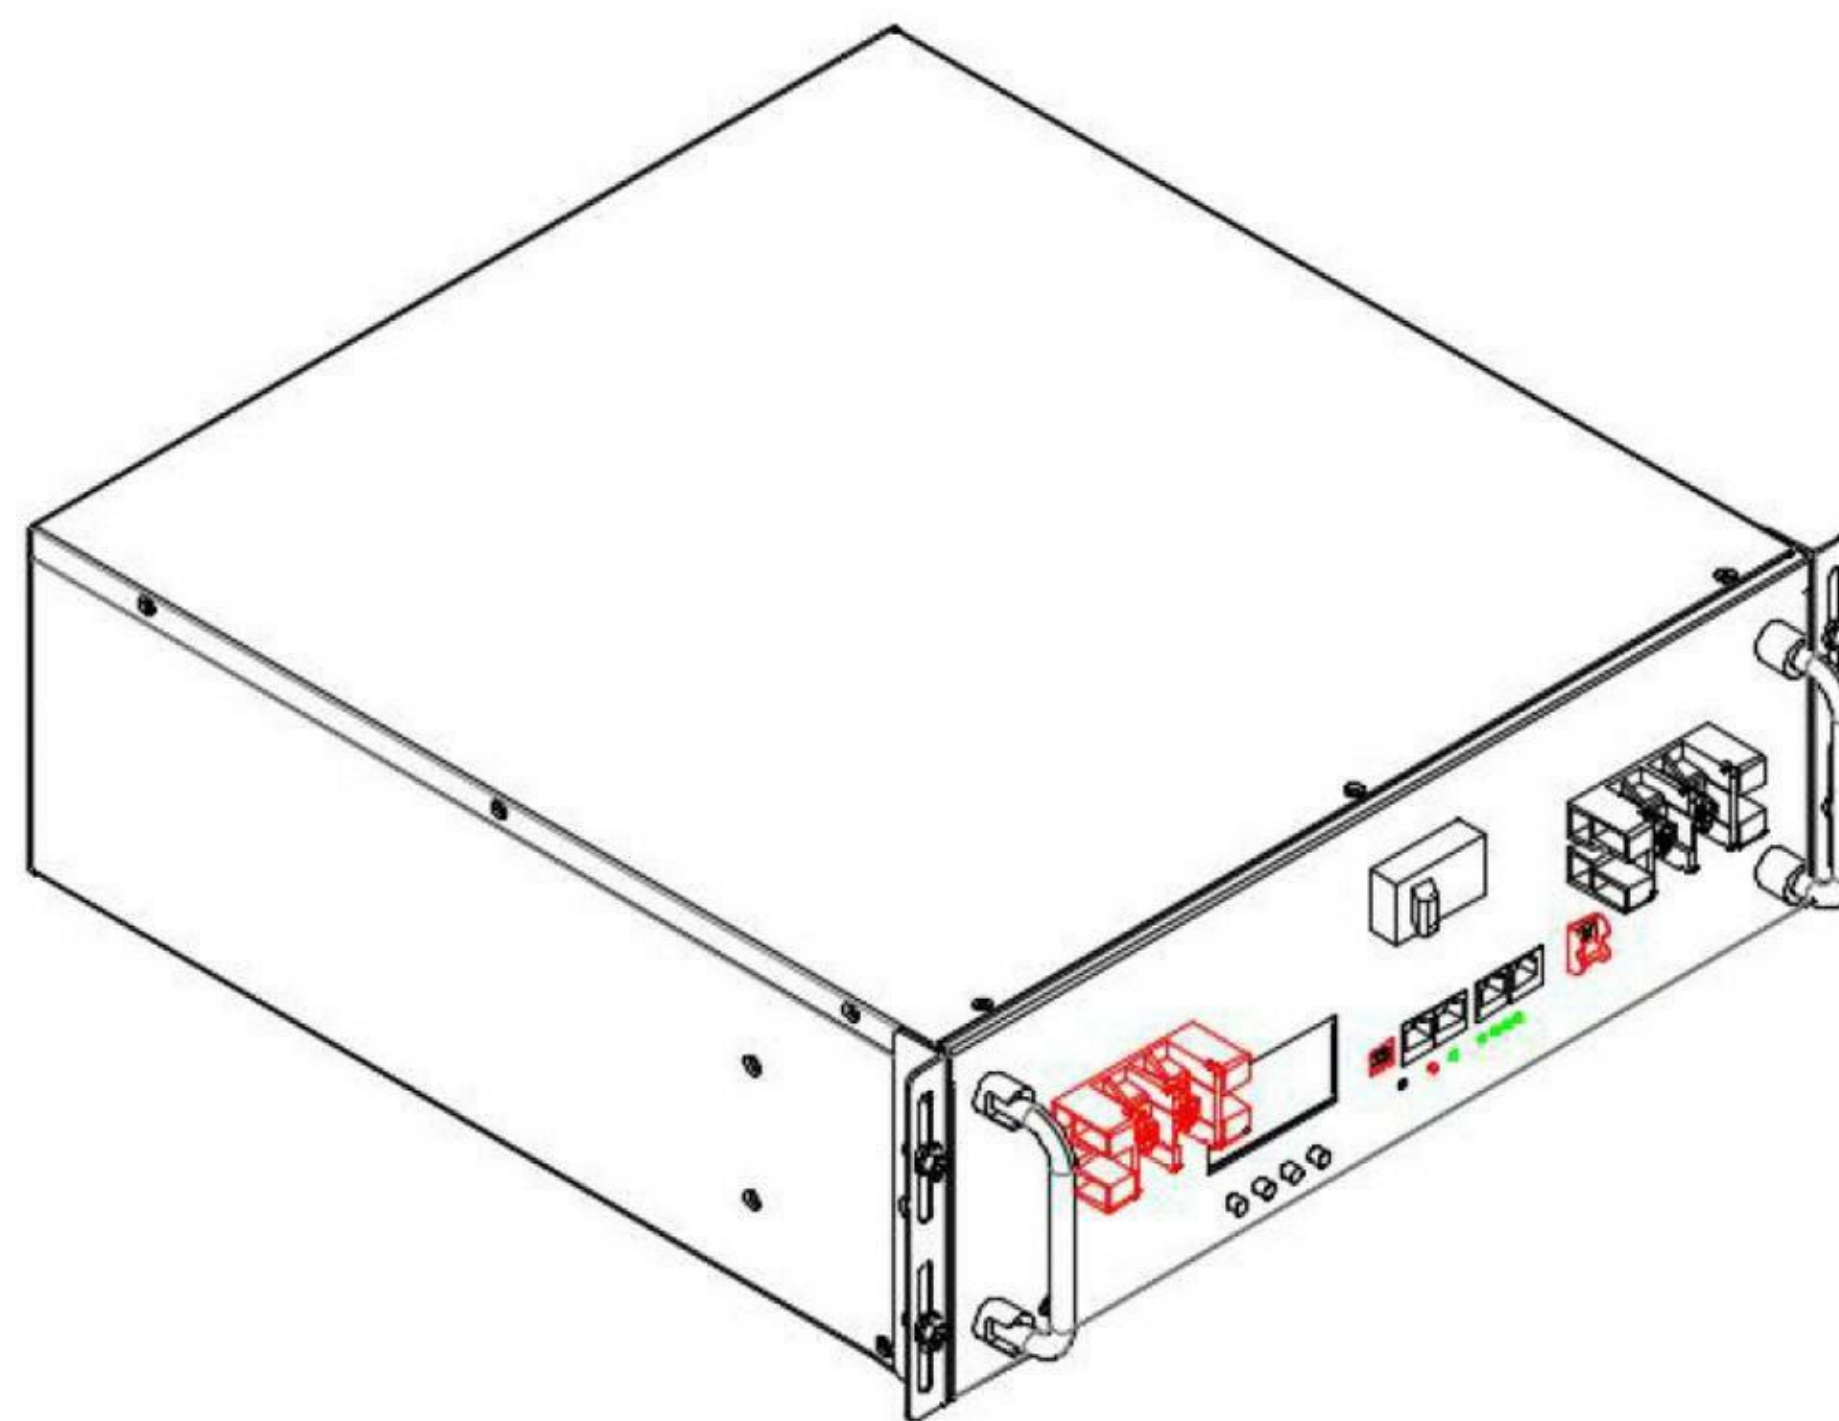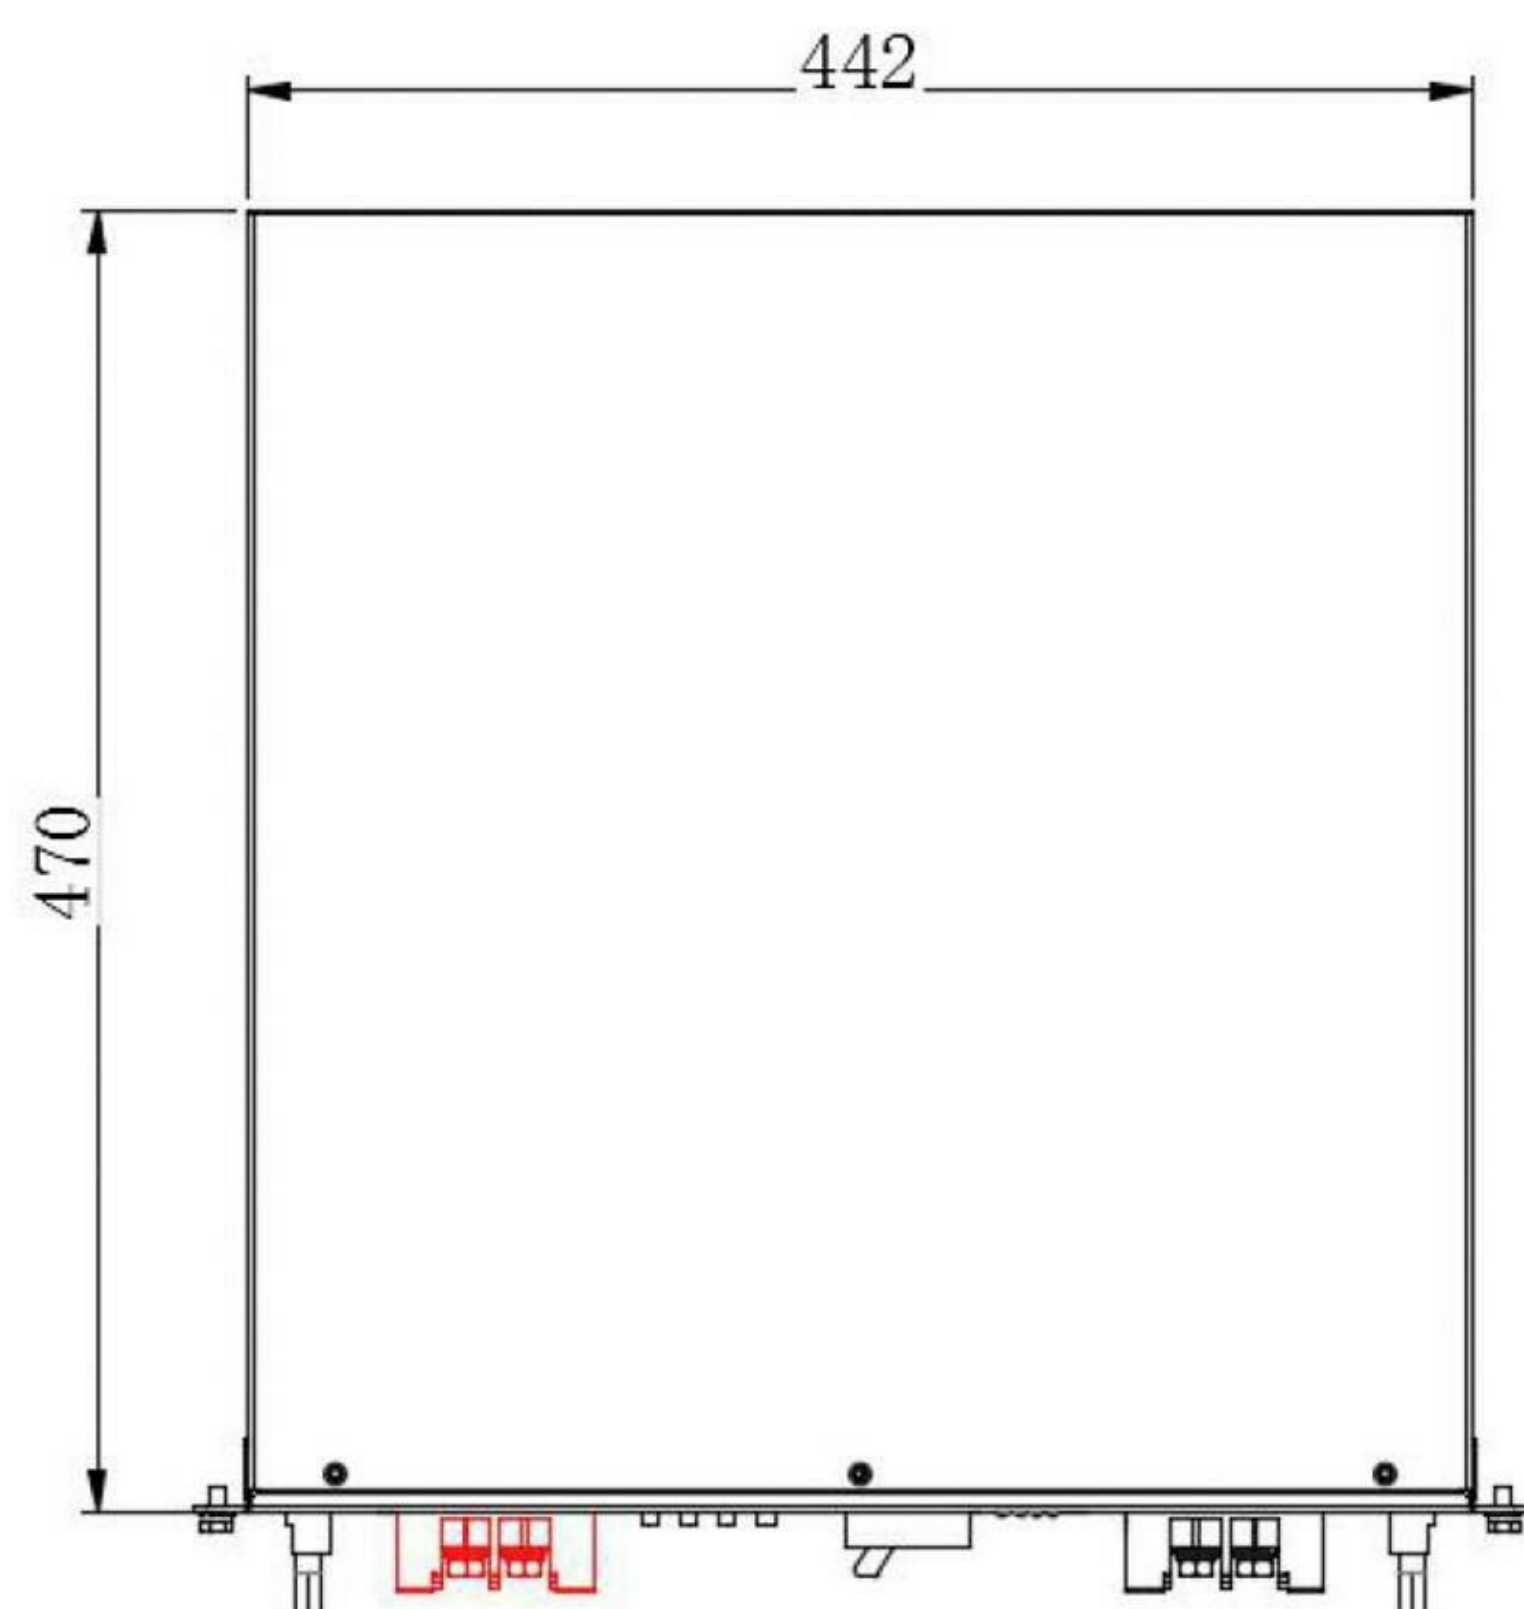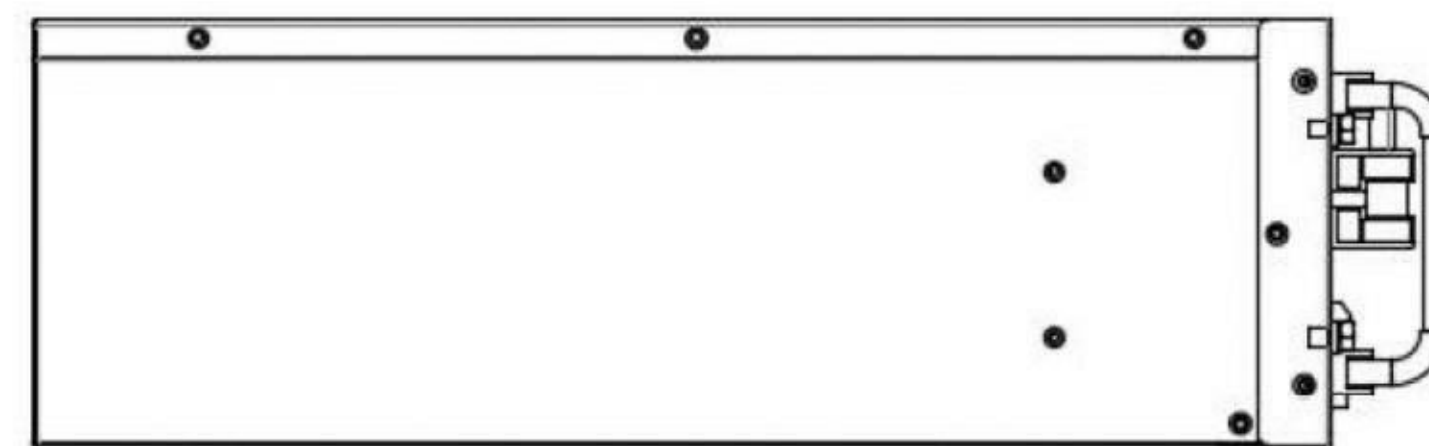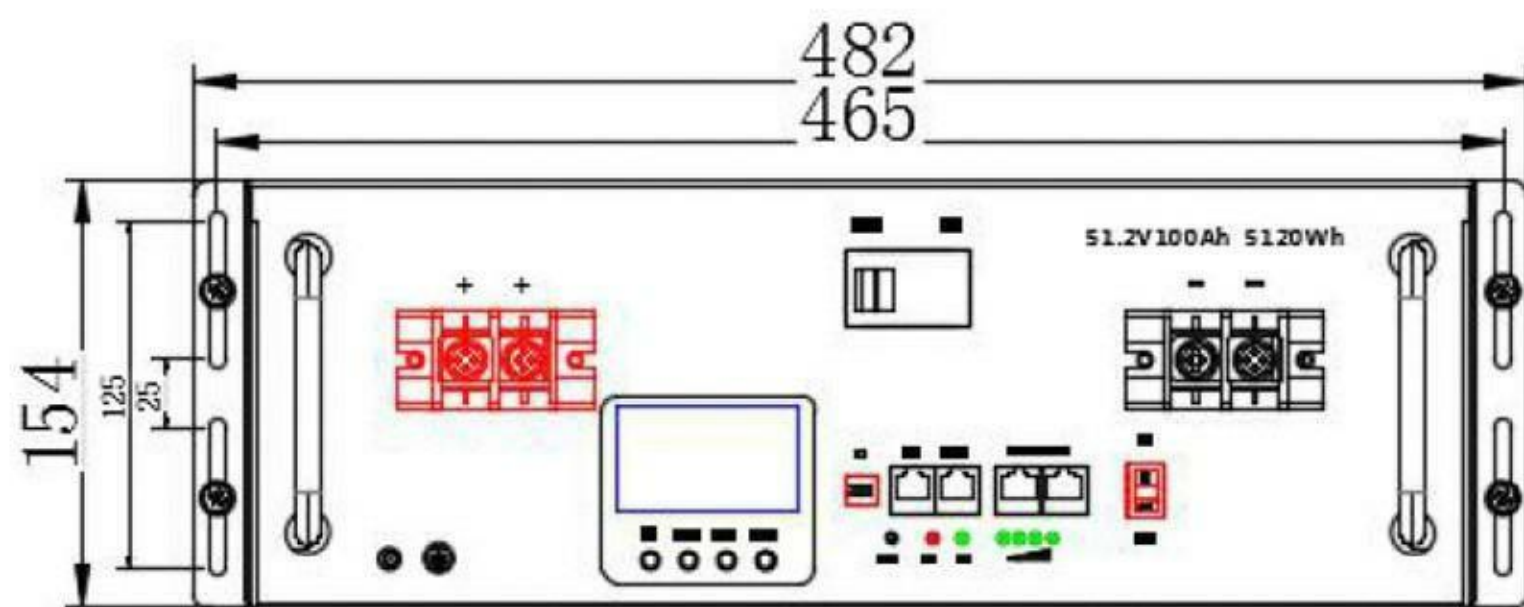

6. Panel Description

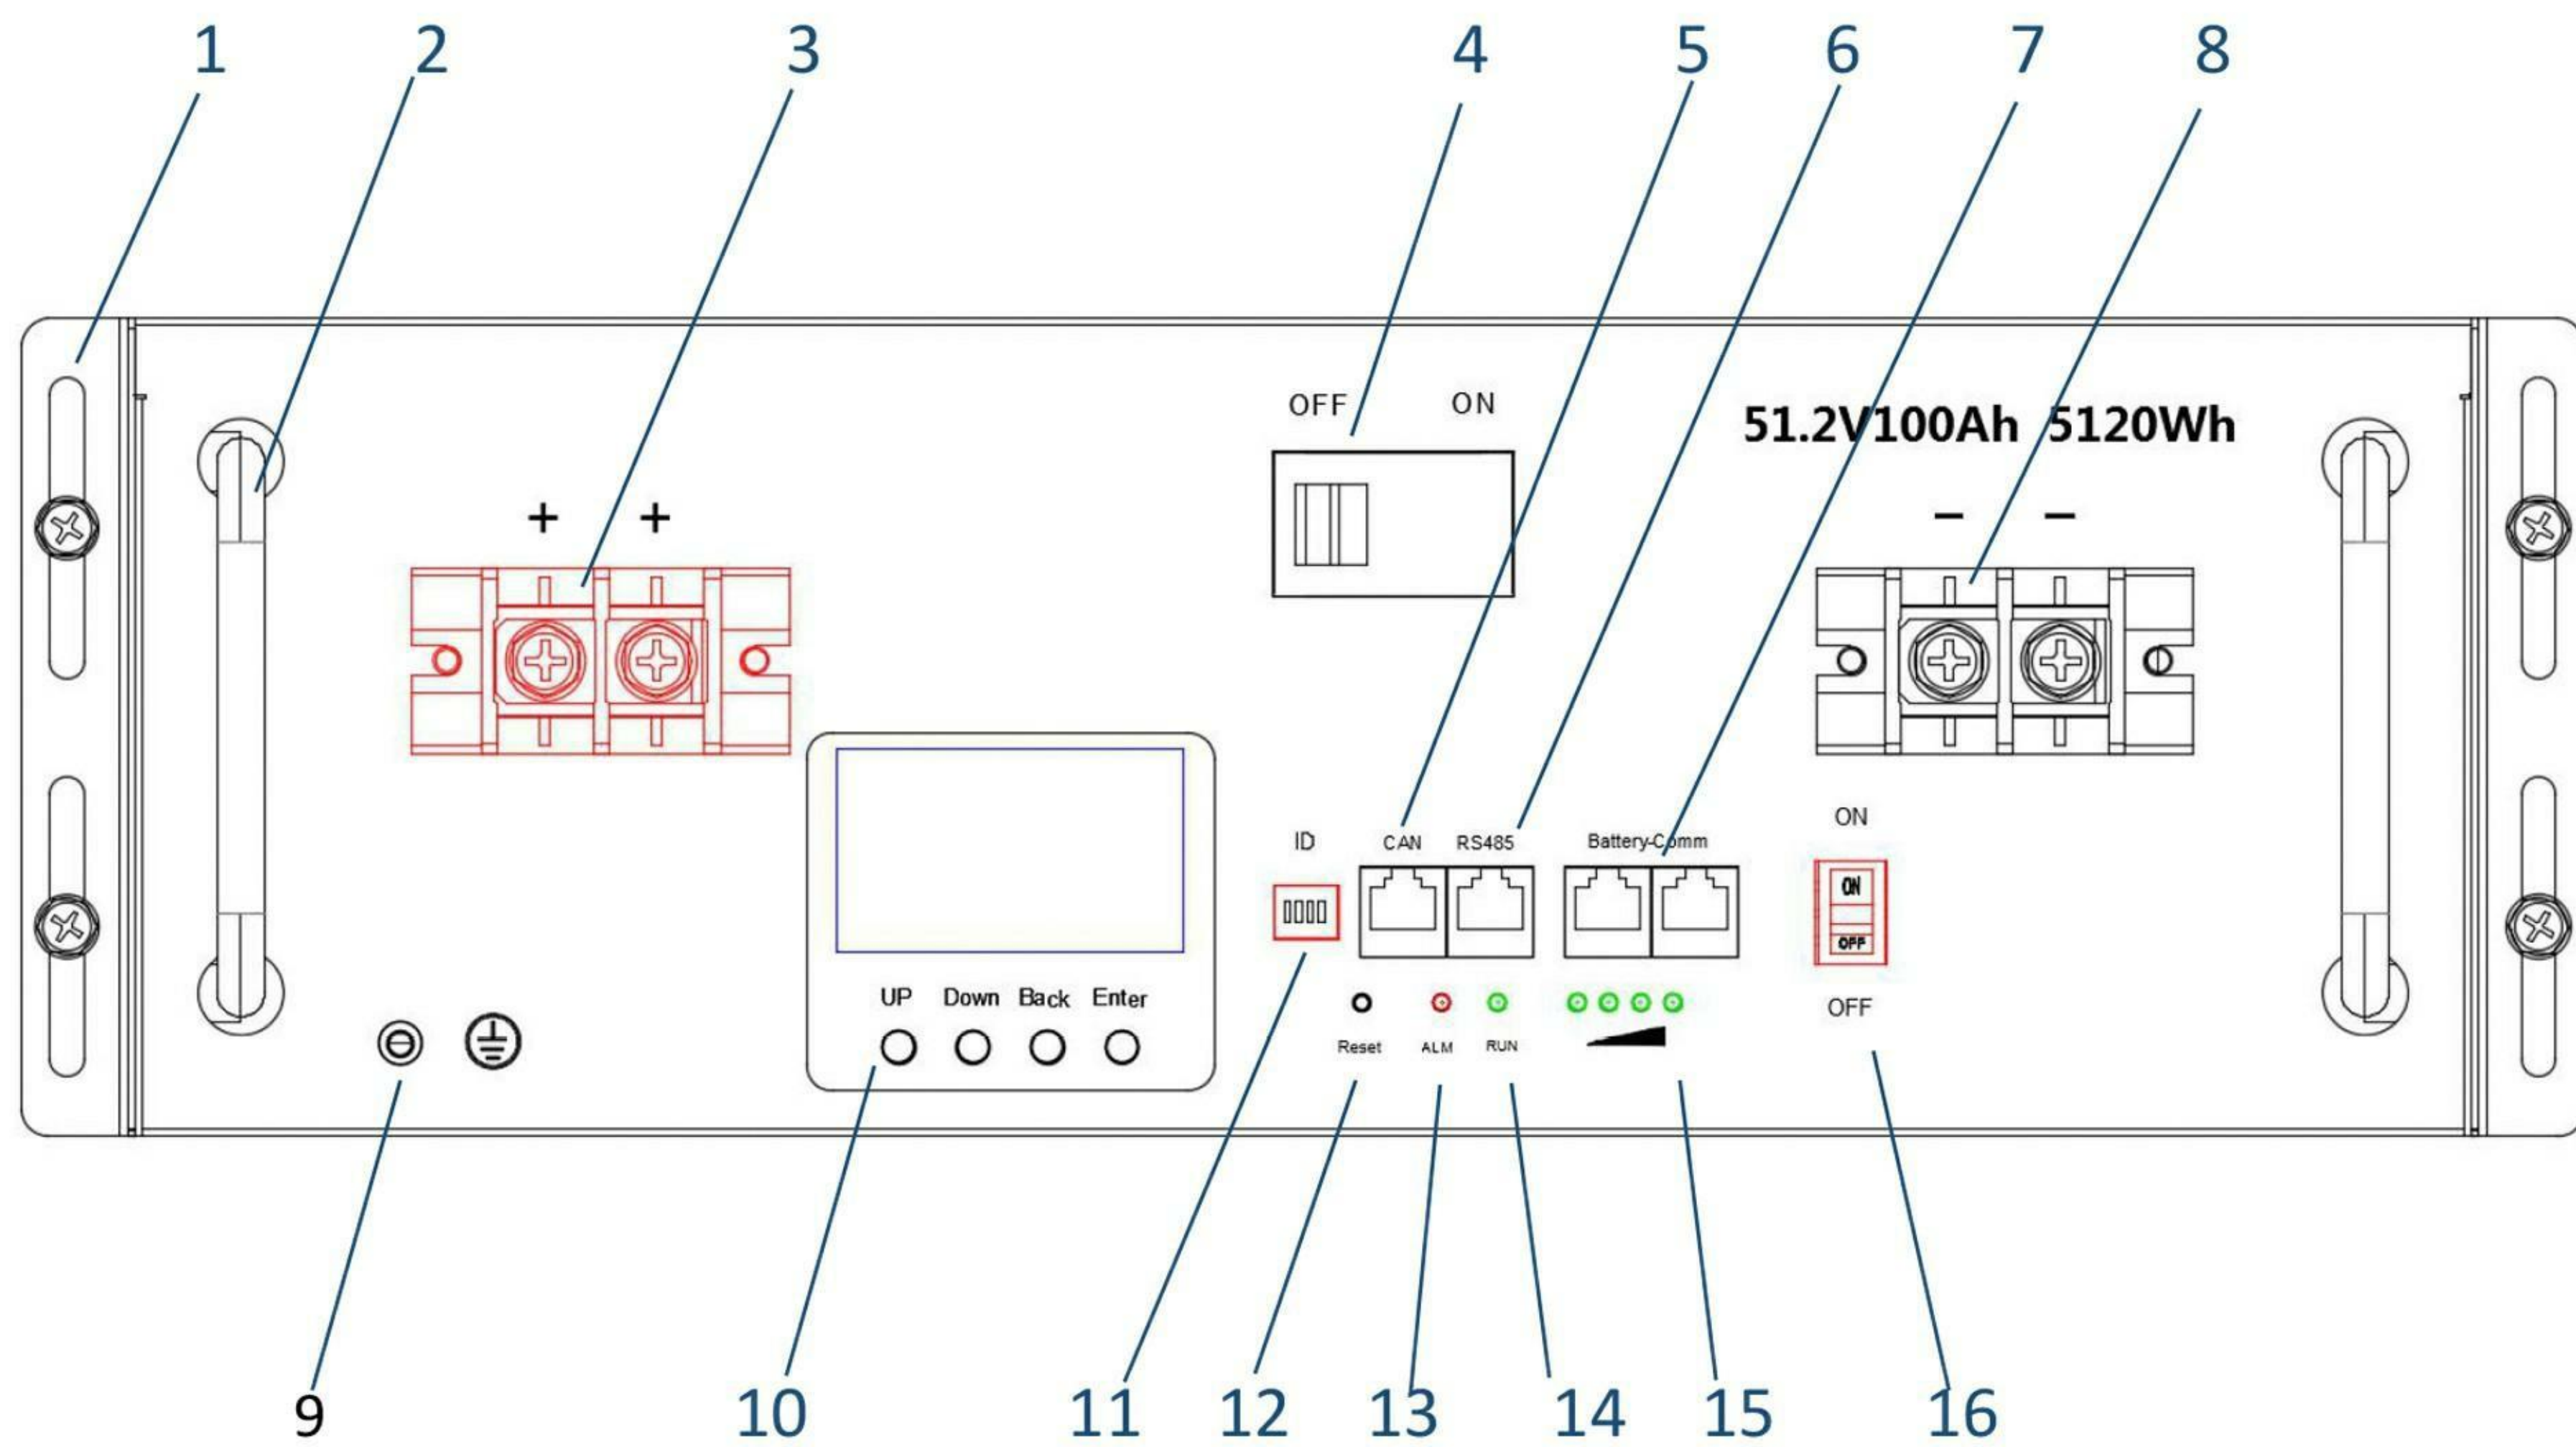

No.	Item	Description	Remarks
1	Rack mount ear	For battery pack mounting	
2	Handle	Handle for carrier	
3	Battery +	Terminal M8 screw	Positive
4	MCB	DC output	
5	CAN	Communication port with inverter	
6	RS485	Communication port with inverter	
7	Battery comm	Internal communication between packs	Parallel application
8	Battery -	Terminal M8 screw	Negative
9	GND	GND Connection for safety	
10	LCD	LCD Screen display battery detail data	
11	ID	Battery address	Definition in manual
12	Reset	Emergency Reset	
13	ALM	Alarm LED display	
14	RUN	Run LED display	
15	SOC	Capacity remaining display	
16	ON/OFF Switch	ON/OFF battery by software	

7. BMS specification

BMS provides complete management and protection for the battery.


- Voltage warning and protection for module and each single cell.
- Current warning and protection, and the maximum operating current can be customized.
- Temperature warning and protection, 4 sensors for battery pack and 1 sensor for BMS.
- Battery module SOC and SOH calculation, display the accurate battery status.
- Communicate with inverter or PC monitor, report the battery data.
- Pre-charge/discharge logic, make sure safety use in whole process.
- Switch-off mode, sleep mode, and operating mode, different mode for different condition.

► BMS parameters.


Item		Parameters		Condition
Charge	Cell voltage protection	3.9V	Delay 1s	Recovery at 3.45V
	Module voltage protection	60.0V	Delay 1s	Recovery at 55.2V
	Over charging current 1	>102A	Delay 10s	
	Over charging current 2	≥120A	Delay 3s	
	Temperature protection	<-5°C or >70°C	Delay 1s	Recover when >0°C or <60°C
Discharge	Cell voltage protection	2.3V	Delay 1s	Recovery at 3.1V
	Module voltage protection	43.2V	Delay 1s	Recovery at 48V
	Over discharging current 1	> 102A	Delay 10s	Recovery in 60s
	Over discharging current 2	> 150A	Delay 3s	Recovery in 60s
	Short circuit	>250A	< 0.1mS	
	Temperature protection	<-20°C or >75°C	Delay 1s	Recover when >-10°C or <65°C
BMS	PCB Temp protection	>105°C	Delay 1s	Recover when <80°C
	Cell balance	150mA	Passive balance	Cell voltage difference > 40mV
	Temperature accuracy	3%	Cycle measurement	Measuring range -40~100°C
	Voltage accuracy	0.5%	Cycle measurement	For cells and module
	Current accuracy	3%	Cycle measurement	Measuring range -200~+200
	SOC	5%		Integral calculation
	Power consumption with different condition	<300uA	Switch-off mode	Storage & transportation
		<300uA	Sleep mode	Protection & stand-by
		<14mA	Operating mode	Charging & discharging
Communication ports	RS485/CAN		Can be customized	

8. Battery module performance Curve


Charge & Discharge curve with 0.5C @ 25°C

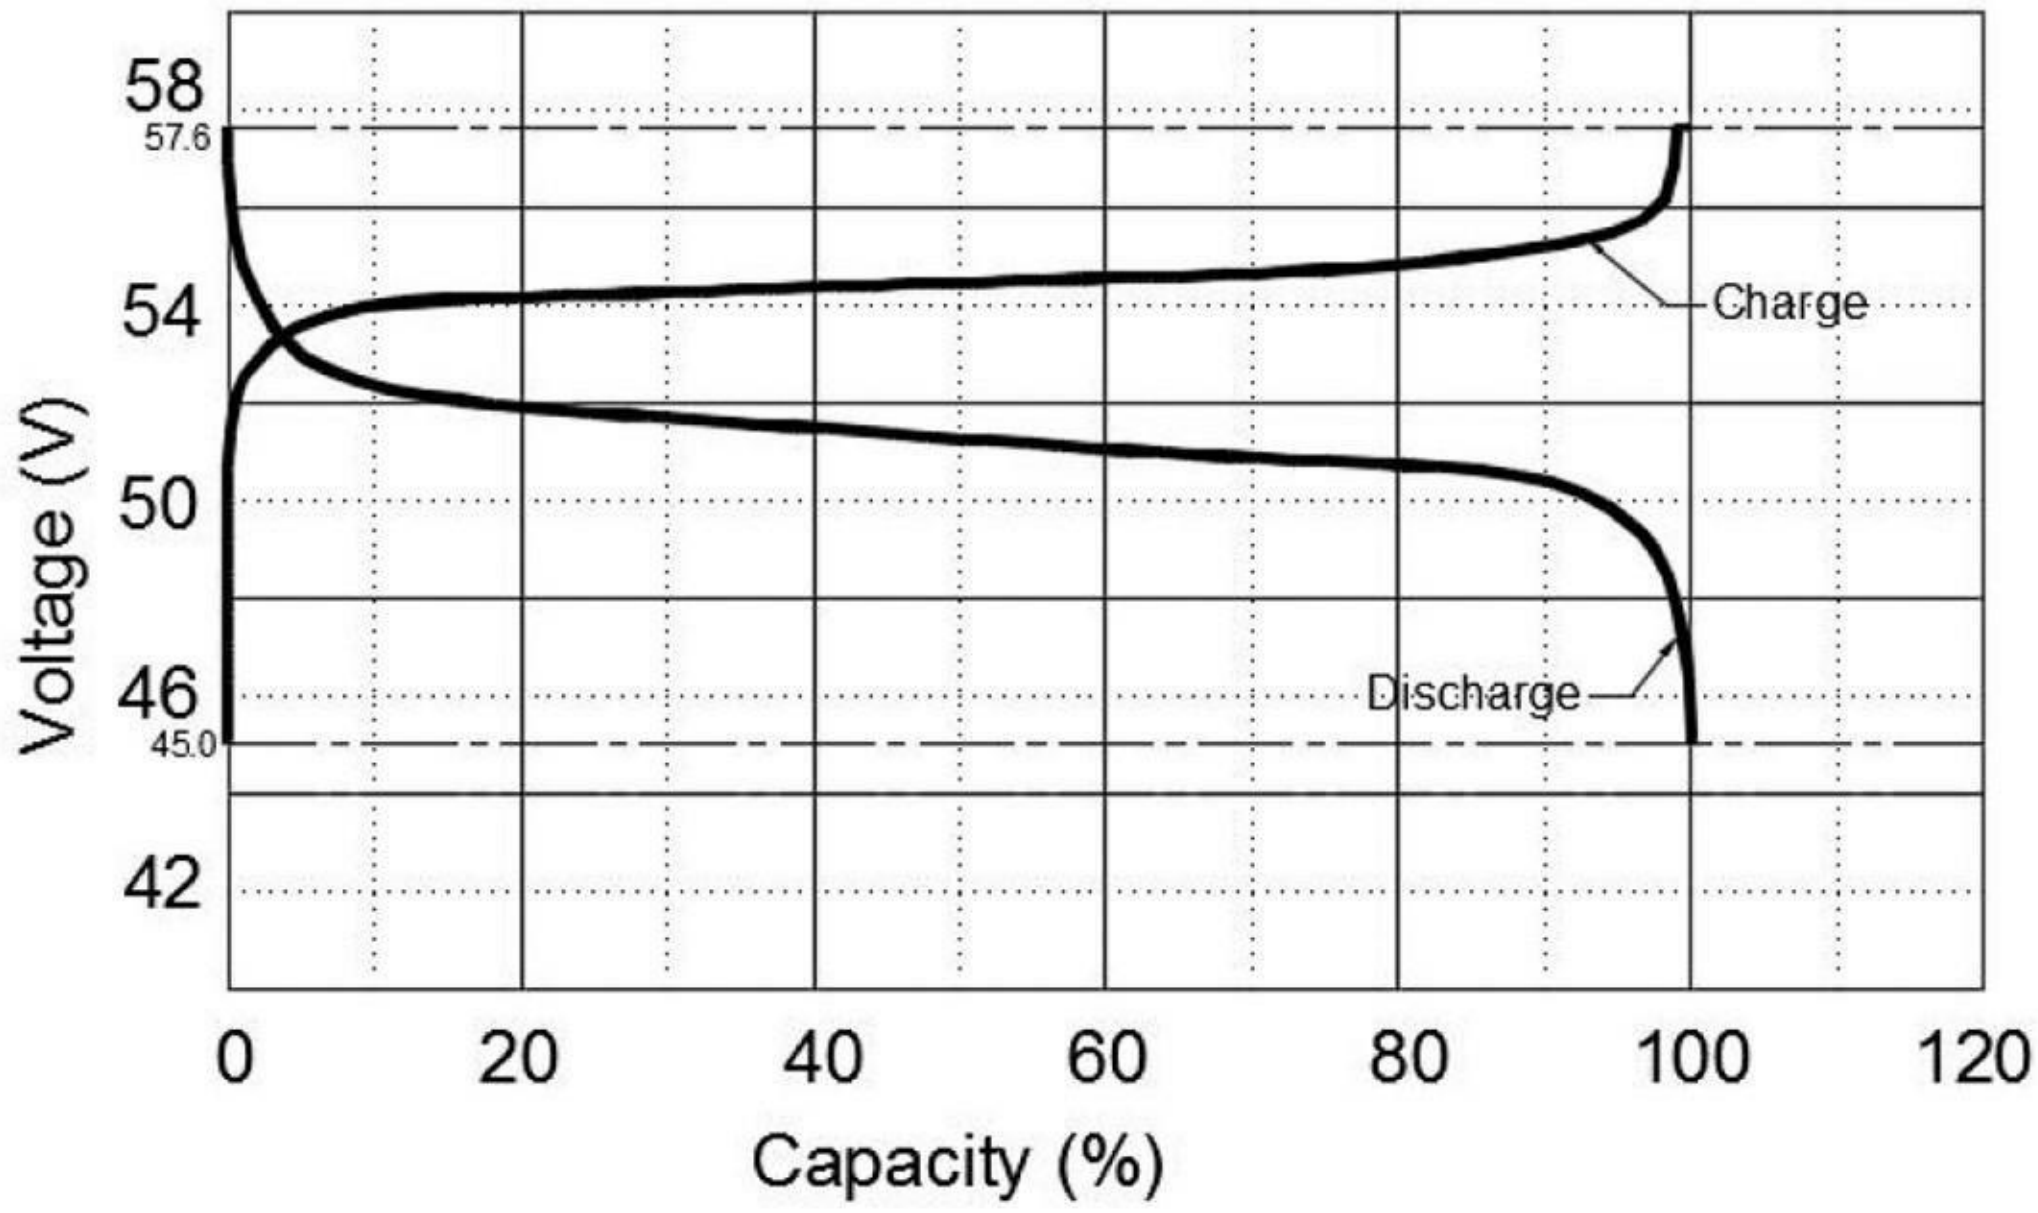


Discharge performance with different rate @ 25°C

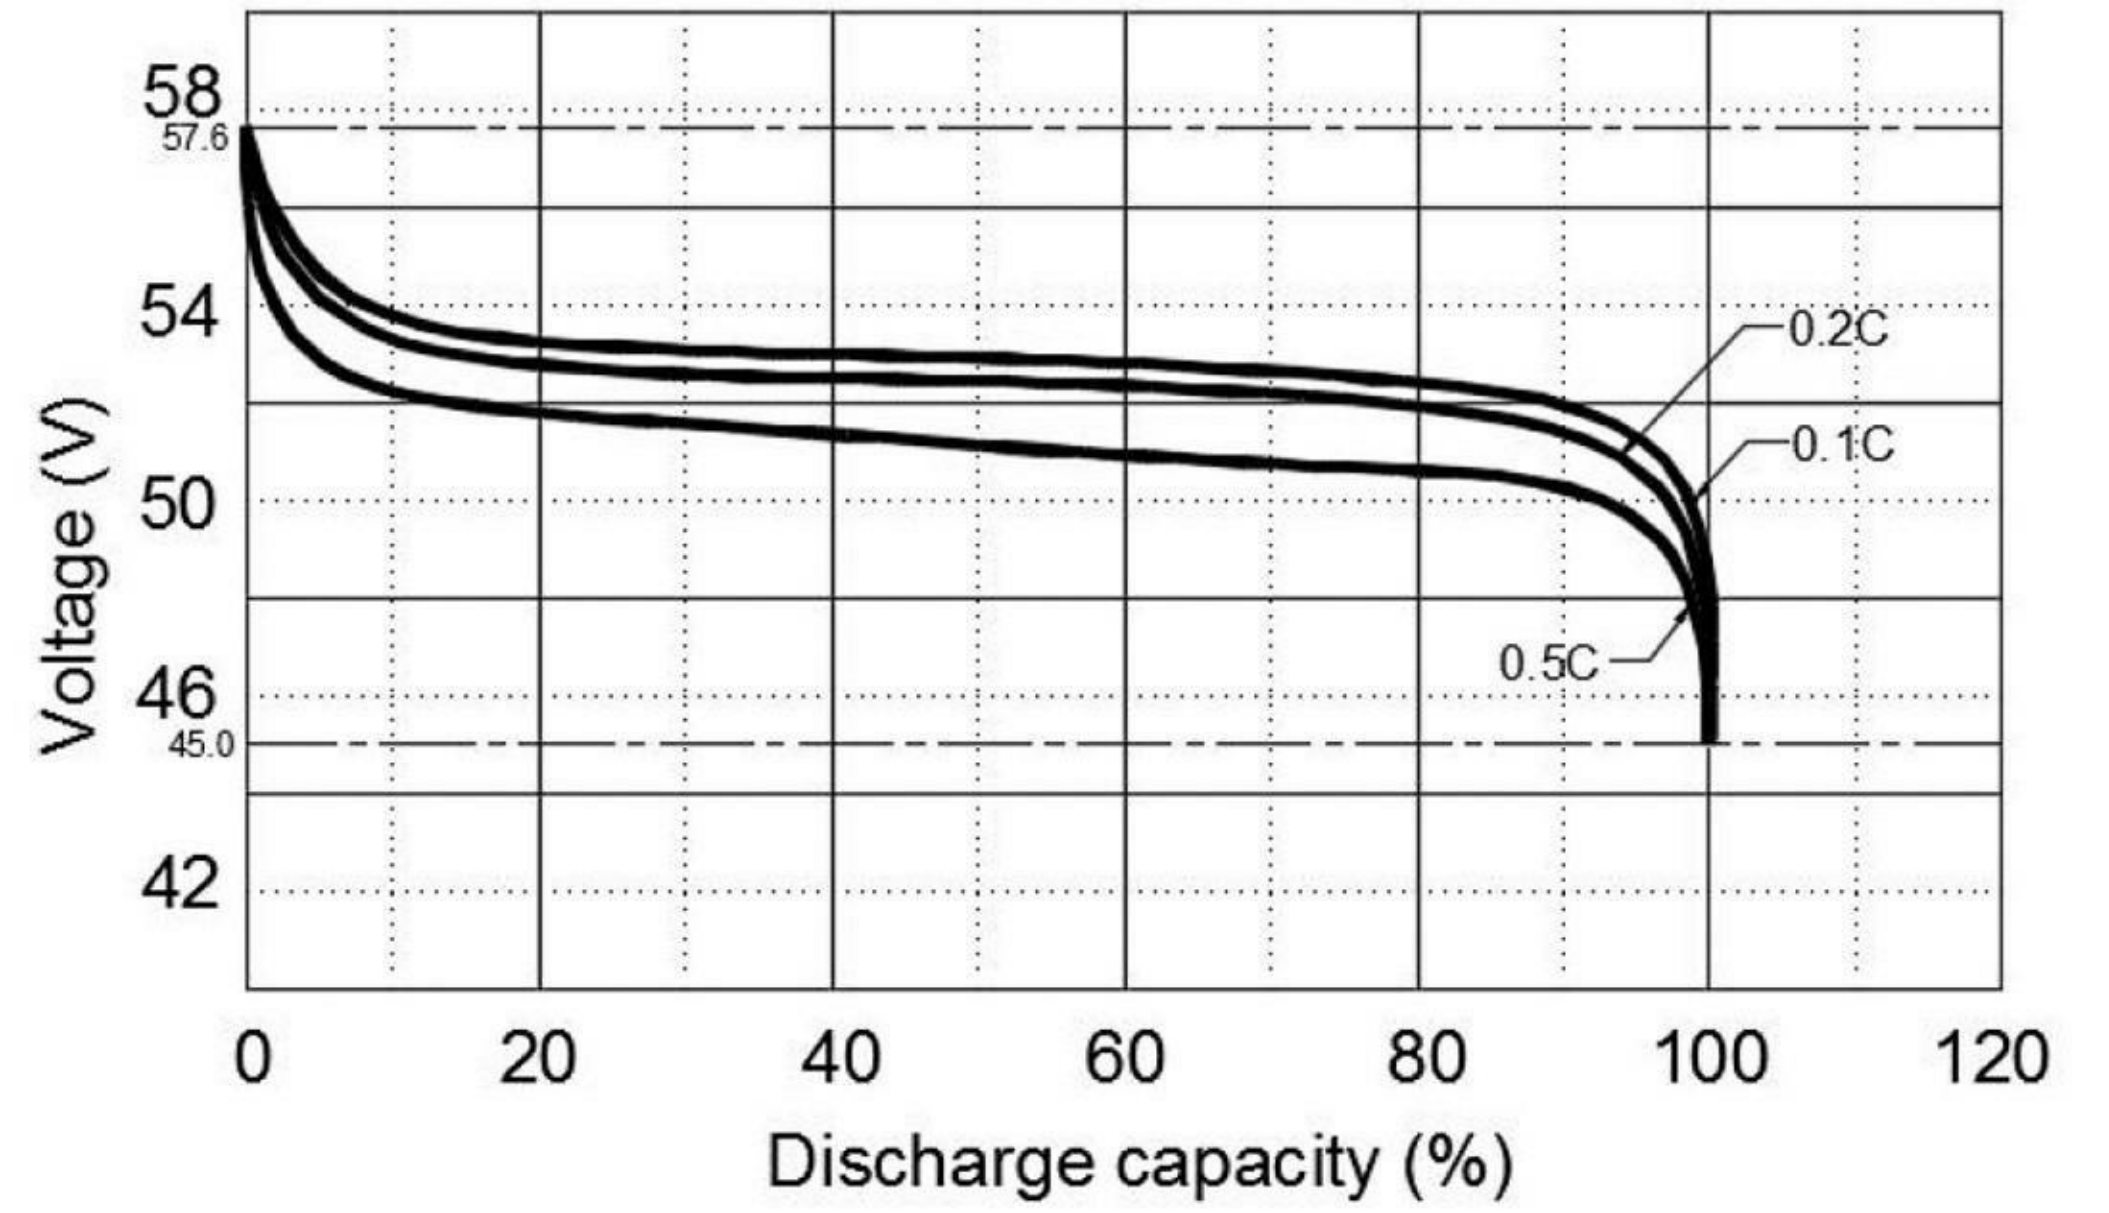

Discharge capacity with different temperature @ 0.5C

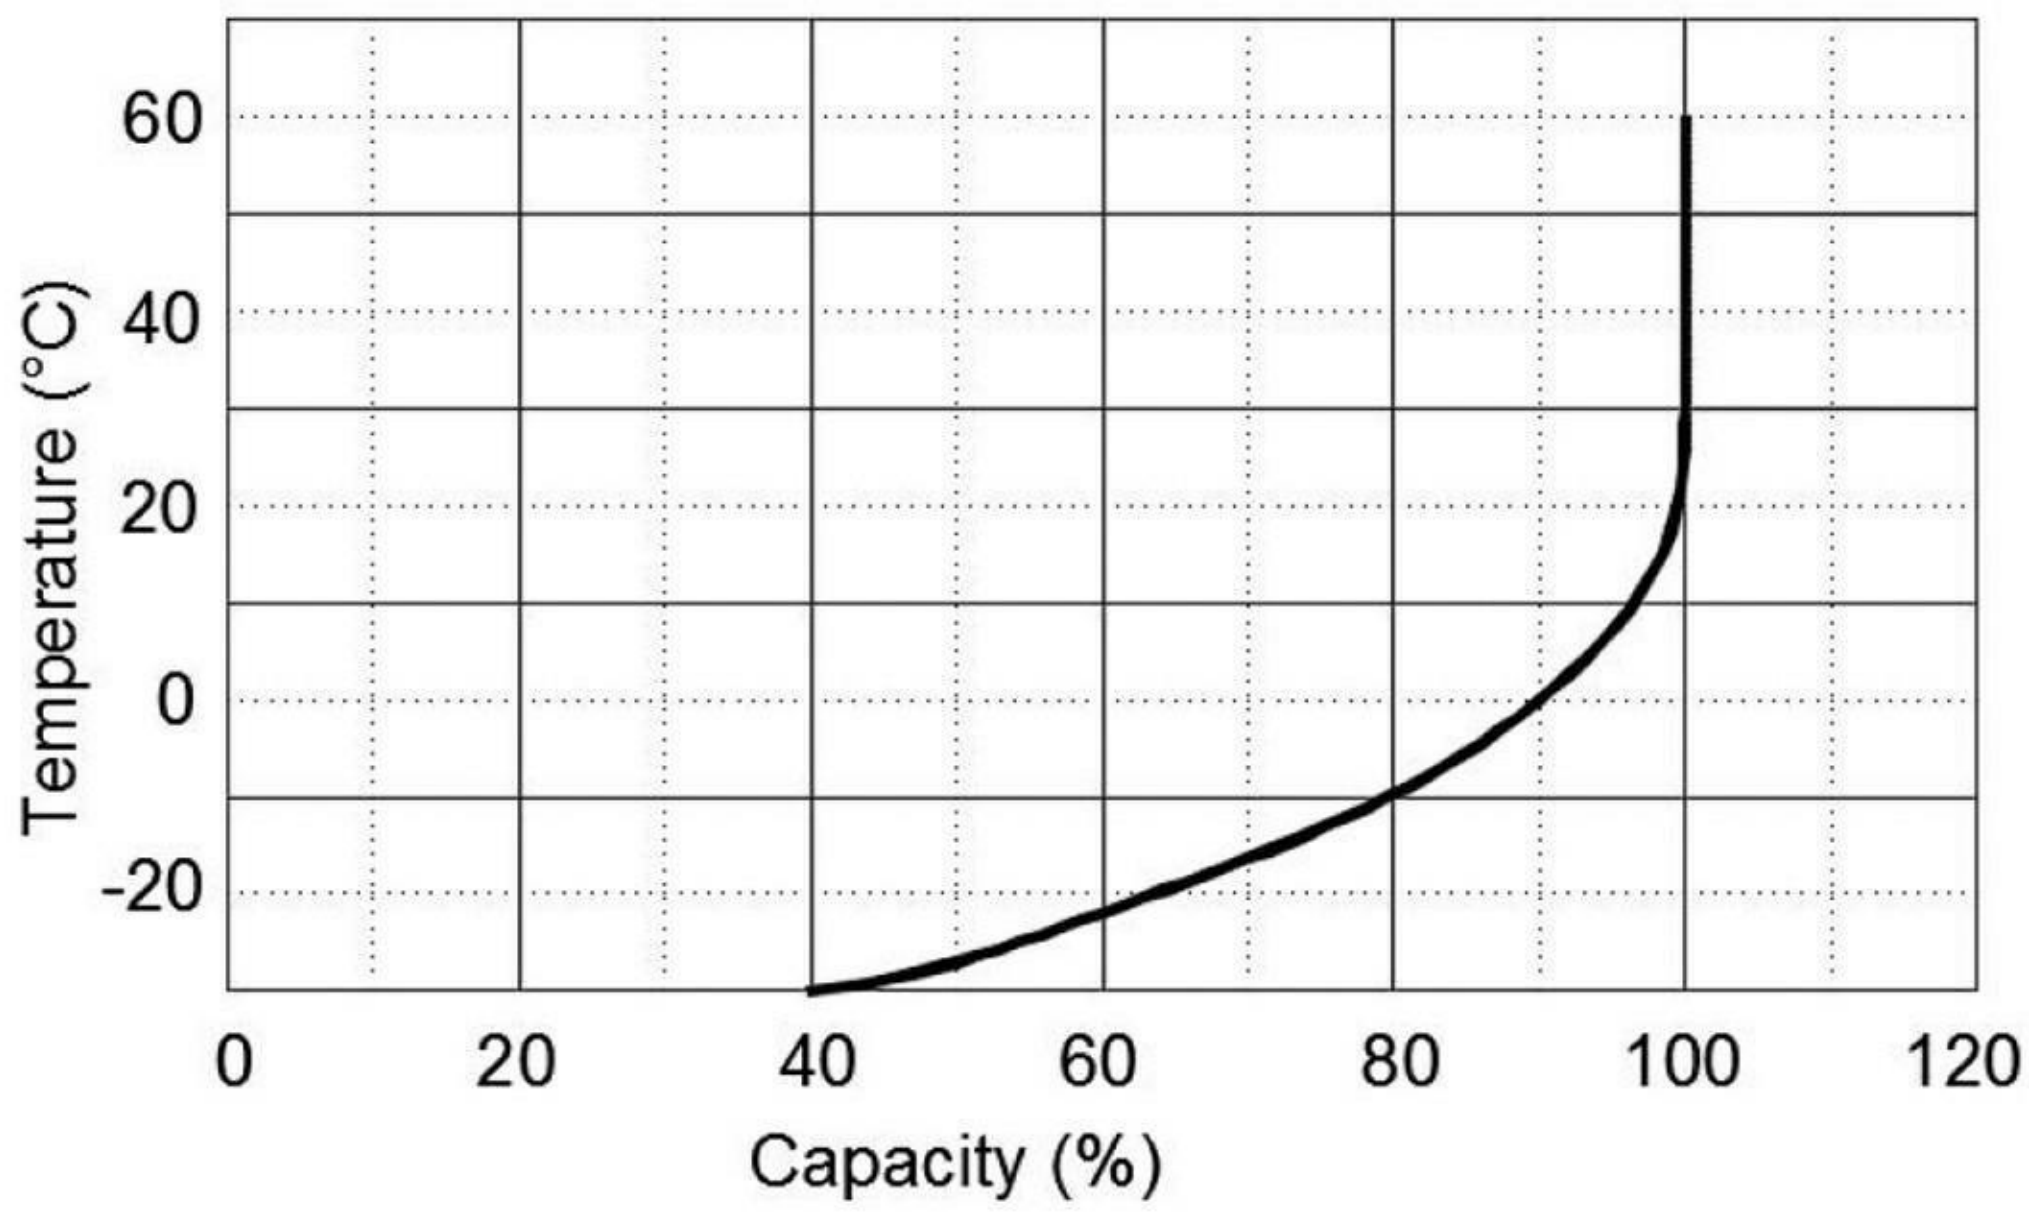

Cycle life with DOD @ 0.5C, 25°C

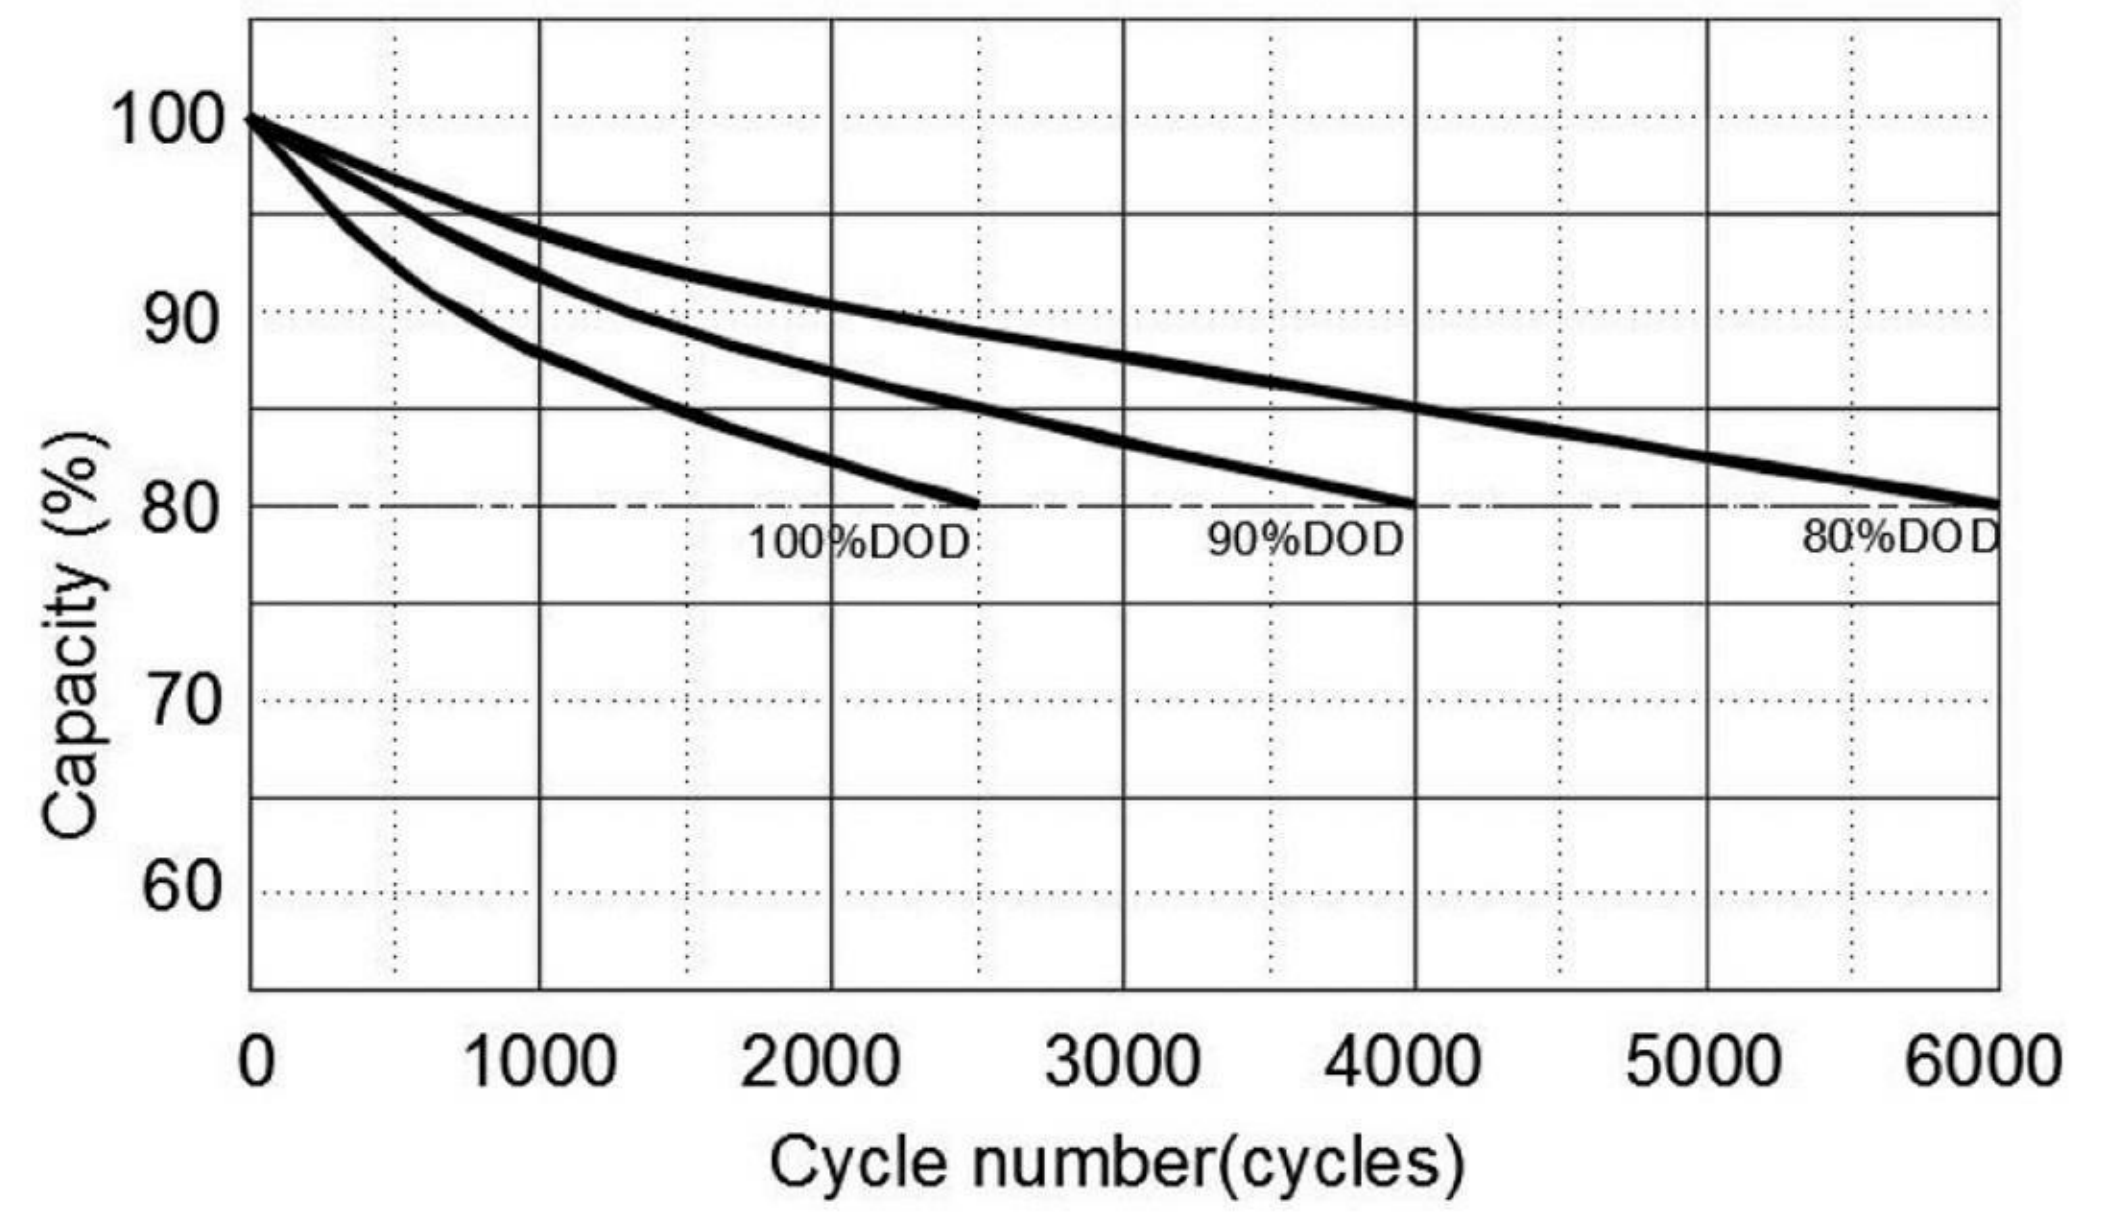

Self-discharge @ different temperature

